


# A/B 2-LINE CEILING SPEAKER



( EN54-24 )




CSD-35EN



CSD-35UBREN

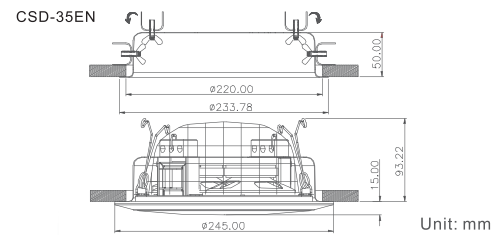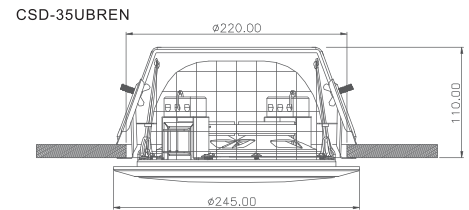

Unit: mm

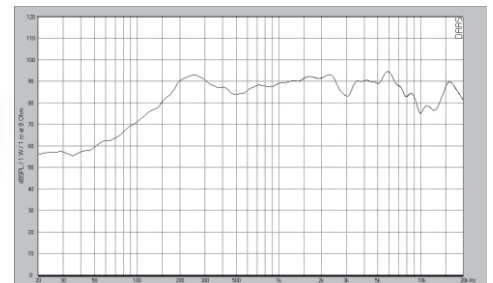

## SPECIFICATIONS

Model No.	CSD-35EN	CSD-35UBREN
Rated Power (rms)	6W	
Speaker	3"x5" Full Range, Dual Cone ( A/B 2-LINES )	
Power Rating( 100V )	6W - 3W - 1.5W	
Impedance	1667Ω - 3333Ω - 6667Ω	
S.P.L. ( at 1W/1M )	88dB	
Maximum Acoustic Pressure	95dB	
Frequency Response(-10dB)	150 Hz ~ 20K Hz	
Dispersion 1KHz / 4KHz	130° / 100°	
Ambient Temperature	-10°C ~ +55°C	
Compliant Standard	EN54-24	
Dimension	245mm(Dia.)x108mm(H)	245mm(Dia.)x125mm(H)
Cut-Out Diameter	220mm(Dia.)	
Material	Steel	
Colour	White	
Weight	1.8Kg	1.6Kg
Power Selection Method	Plug ,Ceramic Terminal Block	
Mounting	Quick-Mount Round Bracket	Spring loaded Quick-Mount "U" Shaped Bracket Assembly
Patent No.	M331262 , Nr.20 2008 000 483 .7	N.A.