



20W Active Wall Mount Speaker w/Microphone

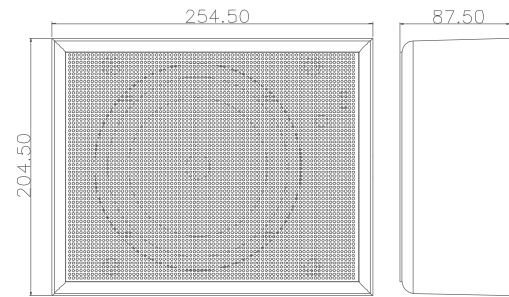

Unit: mm

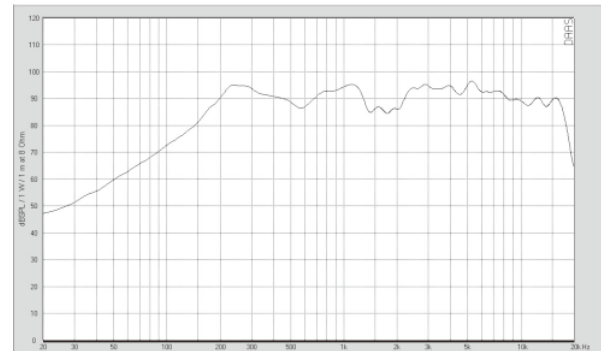

SPECIFICATIONS

Model No.	SMIC-651W24V
Driver Specification	
Speaker	6.5" Full Range, With Dual Cone
S.P.L(at 1W/1M)	92dB
Maximum Acoustic Pressure	99dB
Frequency Response(-20dB)	150 Hz ~ 20K Hz
Dispersion 1KHz / 4KHz	170° / 150°
Ambient Temperature	-10°C~ +55°C
Specification	
Signal Input Level	-20dBV ~ +4dBV
Amplifier Watt.	20W
Voltage Range	12V ~ 24V DC
Volume Adjustment	Internal Volume Control
Microphone	Omni-directional
Cable	Length: 1M (5 Cores)
Dimension	254.5(H) x 204.5(W)x 87.5(D)mm
Material	Housing:UL94V0 Anti-Fire ABS plastic,Grille: Steel
Color	White
Weight	1.4Kg