


Hi-Fi COLUMN LOUDSPEAKER

(WATER RESISTANT IP55 RATING)

(EN54-24 In processing)

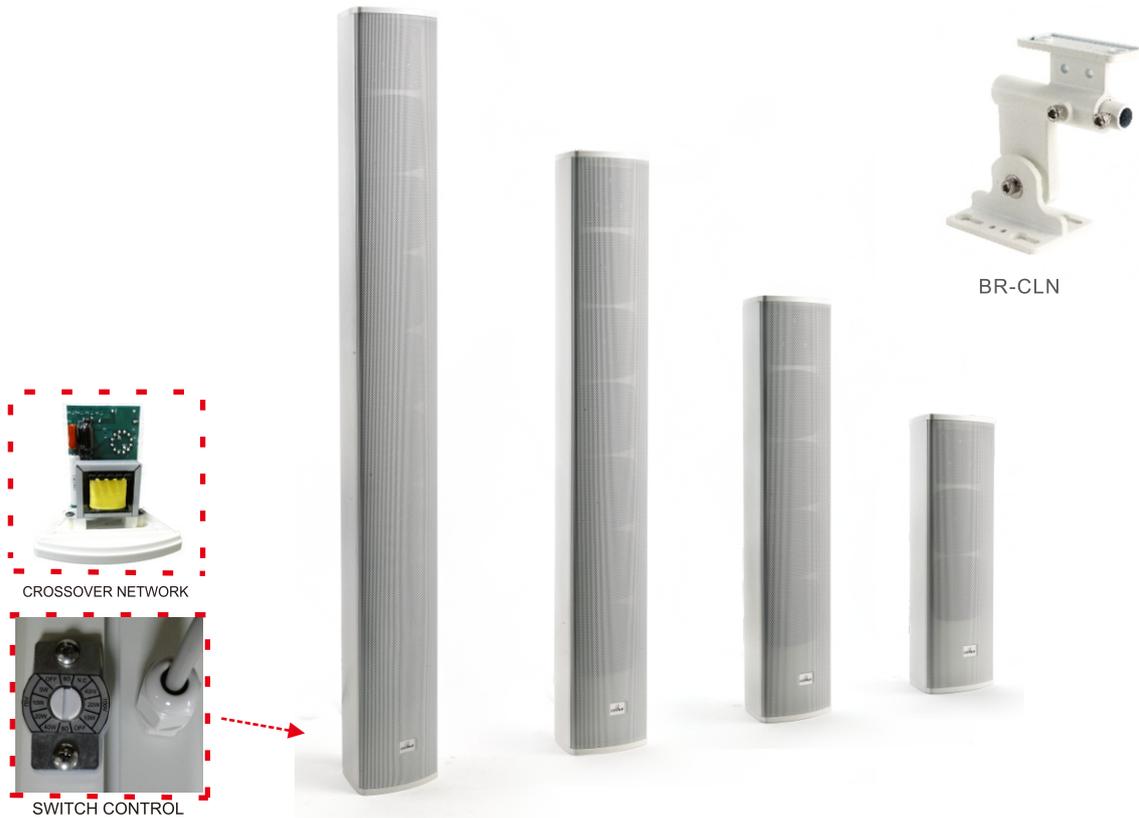

SPECIFICATIONS



Model No.	CLN-3102VS	CLN-3204VS	CLN-3306VS	CLN-3408VS
Rated Power (rms)	10W	20W	30W	40W
Number of Loudspeakers	3.5" Woofer X2 + 3.25" Tweeter X1	3.5" Woofer X4 + 3.25" Tweeter X1	3.5" Woofer X6 + 3.25" Tweeter X1	3.5" Woofer X8 + 3.25" Tweeter X1
Power Rating(100V)	10W-5W-2.5W-1.25W	20W-10W-5W-2.5W	30W-15W-7.5W-3.75W	40W-20W-10W-5W
Power Rating(70V)	5W-2.5W-1.25W-0.625W	10W-5W-2.5W-1.25W	15W-7.5W-3.75W-1.875W	20W-10W-5W-2.5W
Impedance	1KΩ-2KΩ-4KΩ-8KΩ -OFF-8Ω	500Ω-1KΩ-2KΩ-4KΩ -OFF-4Ω	333Ω-667Ω-1333Ω -2667Ω-OFF-6Ω	250Ω-500Ω-1KΩ-2KΩ -OFF-8Ω
S.P.L.(at 1W/1M)	89dB	89dB	90dB	91dB
MAX. S.P.L.(at Rated W/1M)	101dB	104dB	105dB	106dB
Frequency Response(-10dB)	130 Hz ~ 20K Hz	110 Hz ~ 20K Hz	100 Hz ~ 20K Hz	100 Hz ~ 20K Hz
Dispersion 1KHz / 4KHz	180° / 130°	180° / 130°	180° / 140°	180° / 150°
IP Rating	IP55			
Compliant Standard	EN54-24 (In processing)			
Power Selection	Switch Controller			
Dimension	407(L)x124(W)x108(D)mm	610(L)x124(W)x108(D)mm	813(L)x124(W)x108(D)mm	1016(L)x124(W)x108(D)mm
Material	Housing: Aluminum Alloy , Grille: Aluminun			
Colour	White			
Weight	3Kgs	4.2Kgs	5.8Kgs	7.9Kgs
Mounting	Aluminum Alloy Multi Bracket(BR-CLN)			

Hi-Fi COLUMN LOUDSPEAKER



(WATER RESISTANT IP55 RATING)

(EN54-24 In processing)



CLN-3102VS

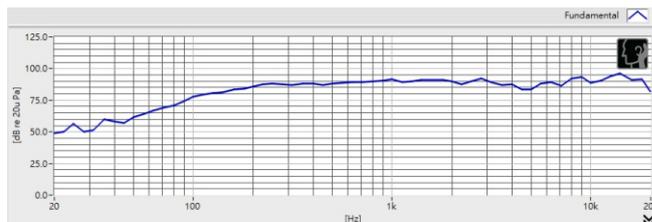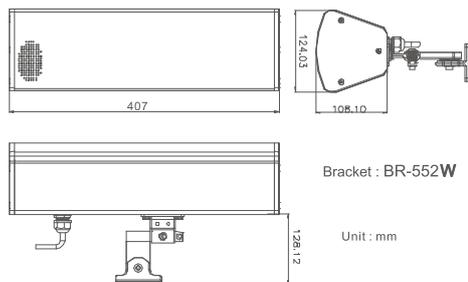



CLN-3204VS

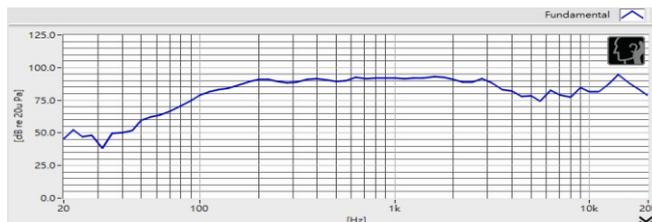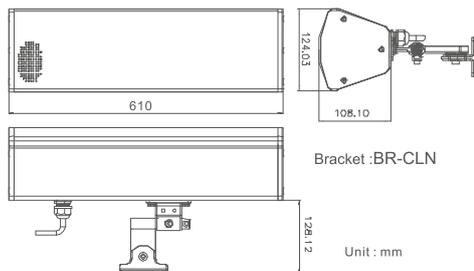

CLN-3306VS

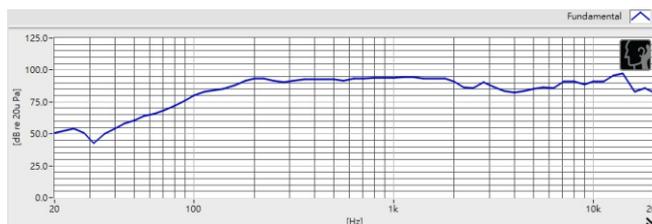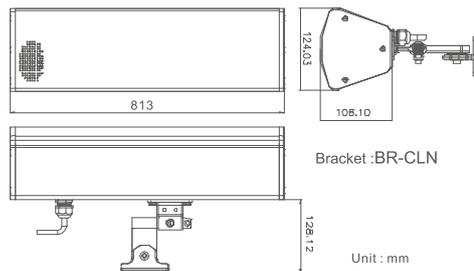

CLN-3408VS

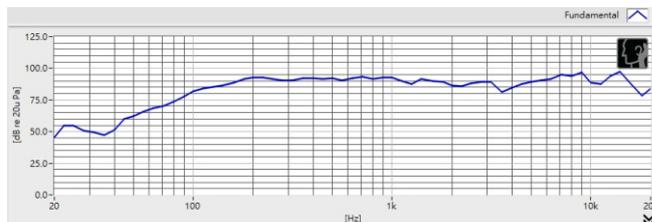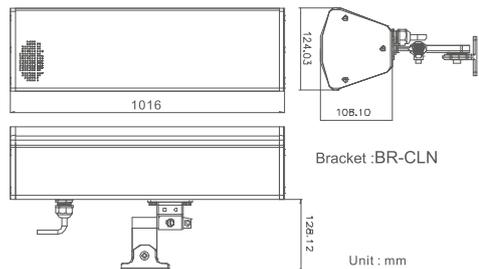

EN54-24 In processing

CLN-xxxVS SERIES